

Platform Specifications



Platform

Key Features

- Sunlight Readable
- LED Backlight
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- 70000hrs Life Expectancy



SLD1744 (AUO M170EG01VD)

Model No.	SLD1744
LCD Display	17" LED Backlight LCD
Display Area	337.92 x 270.336mm
Brightness	1000 cd/m ²
Resolution	1280x1024 (SXGA)
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.264(H) x 0.264(V)
Viewing Angle	+80°~-80°(H), +80°~-80°(V)
Display Colors	16.2M colors
Response Time	5ms (Typical)
Sync	LVDS
Power Consumption	33W
LED Driving Board	LI D17A
Control Board (Optional)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-), Auto
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	436x373x61.6mm
Weight	6.33kgs
Optional	<input checked="" type="checkbox"/> Touch Screen

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
<input checked="" type="checkbox"/> AD1501GDV	VGA+DVI+S-Video
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-), Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)

SLO= Open Frame

SLD= Industrial Casing




Platform Specifications



Platform

Outline Dimensions unit:mm

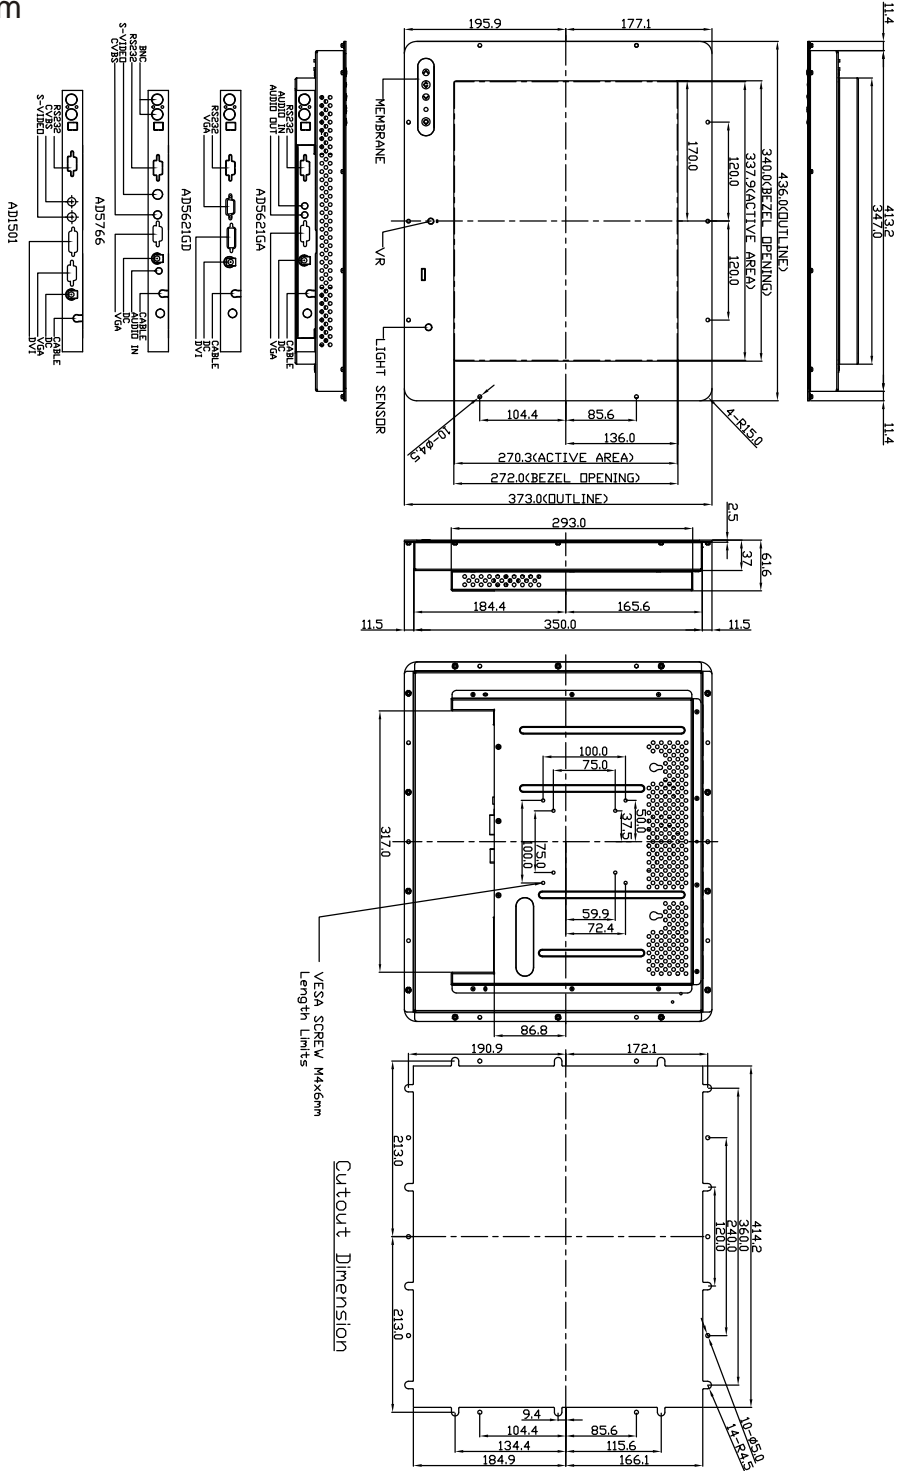

- Note:1.DSD membrane can be on front or rear cover.
- 2.4 different AD boards can be selectable.
- 3.Light sensor and VR are optional function.
- 4.Temper glass and touch screen can be installed.